



COATING

CONVERTING

DISTRIBUTION

volzMount & volzFix

Double-Sided Tapes for Distributors,
Converters, Industry & Trade

VOLZ® TAPES high performance double-sided tapes provide a strong, immediate bond that eliminates the need for screws or rivets. They grant a clean, streamlined finish and are quick and easy to apply.


volzMount and volzFix professional, double-sided tapes deliver long-lasting adhesion on nearly all types of surfaces including glass, plastic, metal, fabric, ceramic and paper. They are the perfect solution for every tough industrial application.

Trusted by leading brands across the trades, automotive, industrial, electronics, and appliance sectors - our double-sided tapes deliver reliable performance where it matters most.

VOLZ® TAPES supply formats are versatile and designed to meet the extremely specific and diverse needs of all sized companies, manufacturers, converters and distributors.

volzMount and volzFix are available in a variety of combinations of carriers and adhesives, in addition as pure, carrier-free adhesive transfer tapes. Offered in small and large jumbos, individually cut, in log rolls, and as custom stamped or lasered die-cuts. Whatever you need to fit your exact requirements.

As a tesa® Gold Converting Partner, we also offer the entire tesa® Industry product portfolio, as well as standard and customized products from 3M, Nitto, Scapa, and other other top manufacturers.

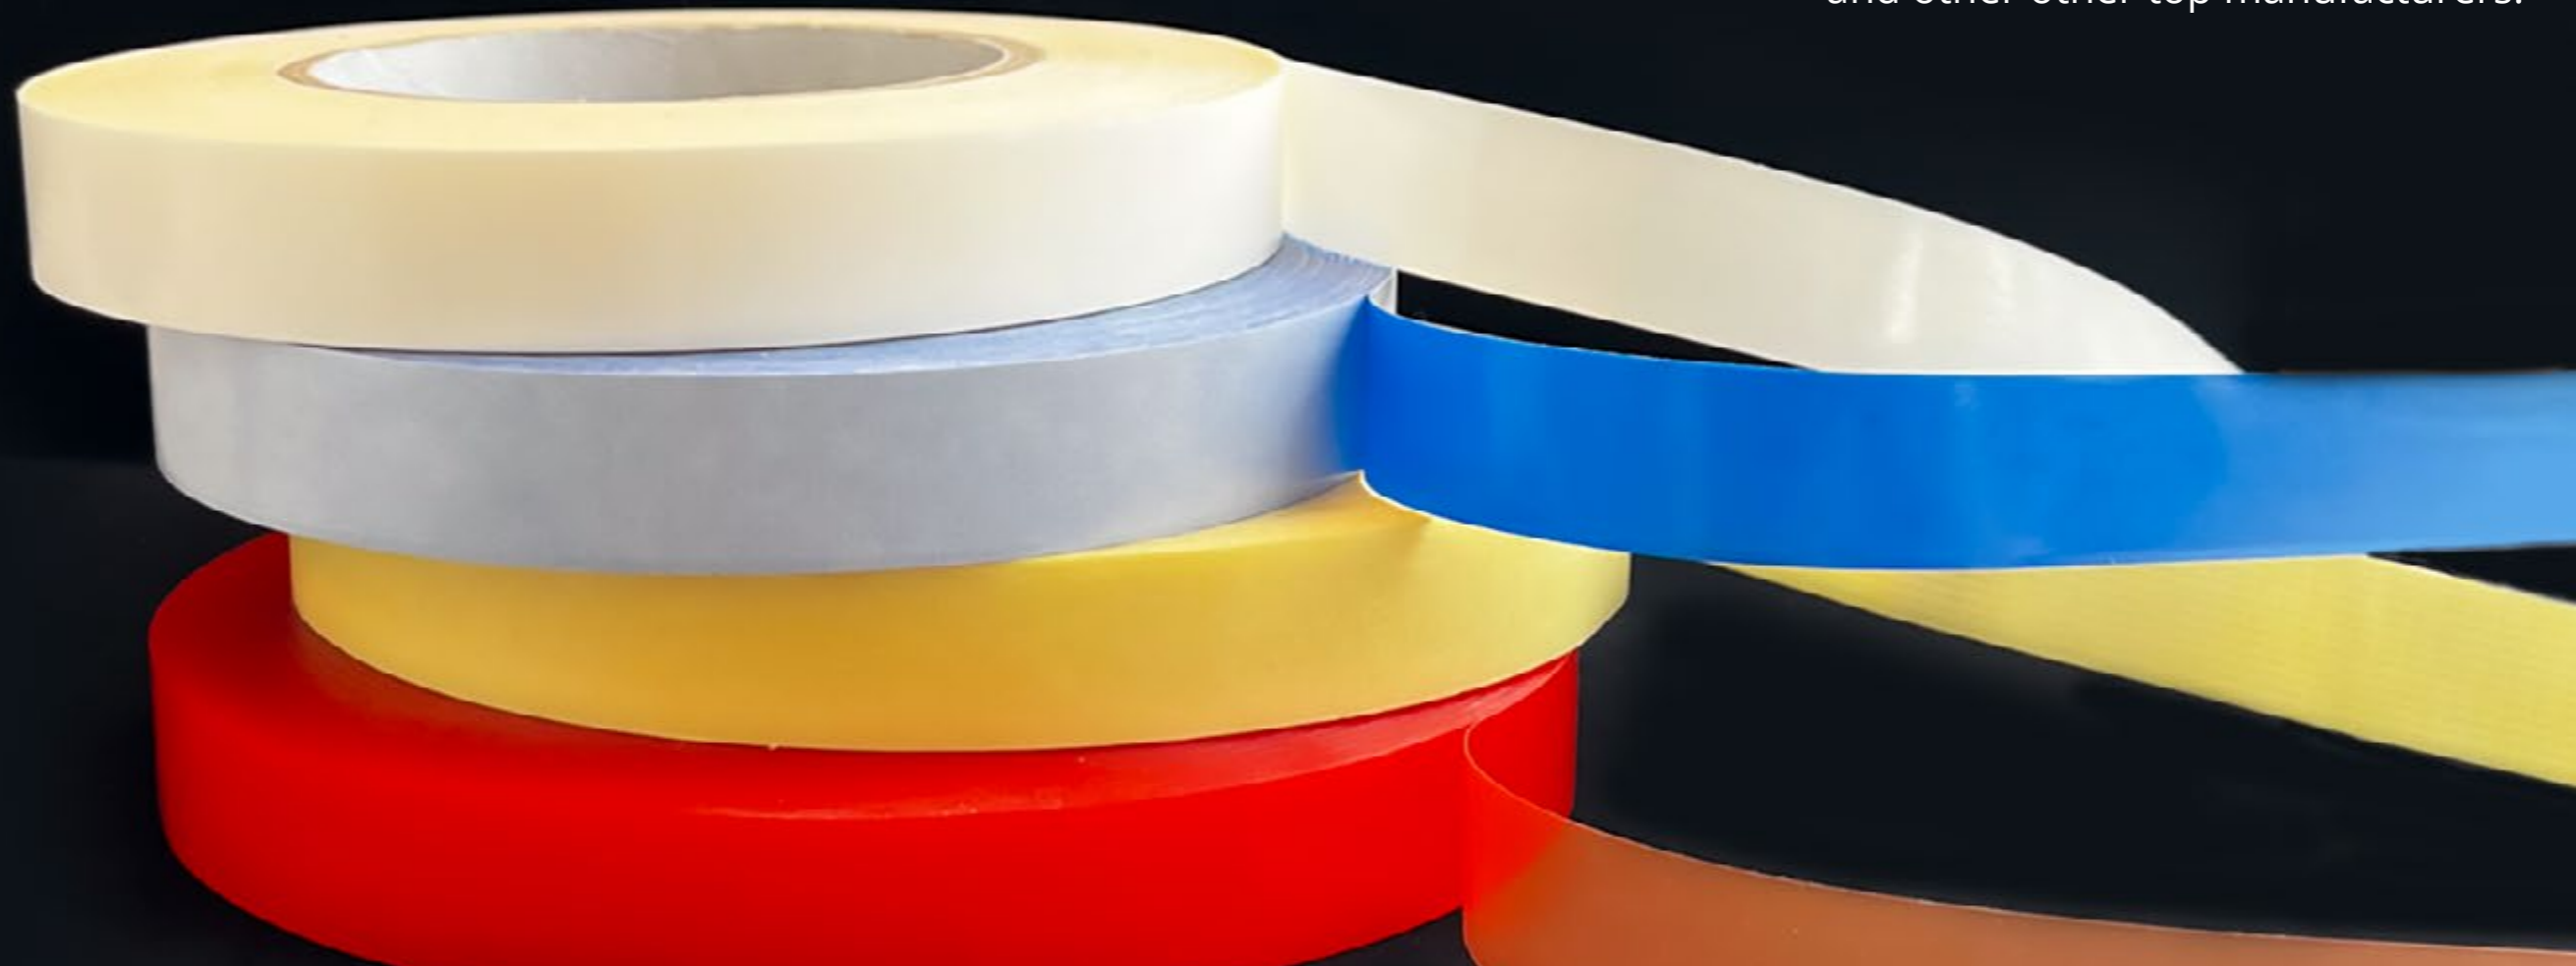

- INVISIBLE BOND THAT MAINTAINS SURFACE INTEGRITY
- EVEN STRESS DISTRIBUTION AND SHOCK ABSORPTION
- CORROSION RESISTANCE BETWEEN DISSIMILAR MATERIALS

- FAST AND EASY TO USE
- ADHESIVE PROPERTIES ON EACH SIDE FULLY CUSTOMIZABLE
- PROTECTIVE AGAINST MOISTURE AND THERMAL LOSS

volzMount & volzFix

	Backing	Adhesive	Liner	Thickness without liner (mm)	Adhesion to Steel (N/25 mm)	Tensile Strength (N/25 mm)	Elongation (%)	Shear Strength (h)	Rolling Ball (cm)	Temperature Resistance	Automotive & Electronics	Carpet Bonding & Exhibition Services	Furniture, Leather, & Textile Industries	General Purpose	Graphic Design & Sign Industry	Lamination	Paper & Cardboard Industries	Trim & Profile Manufacturing	
CLOTH																			
V4023	Cotton Cloth	Synthetic Rubber plasticizer free (clear)*	65 g Brown Bi-Siliconized Paper	0,340	O: 12,50 C: 17,50	74,50	< 3,7	O: 1 C: 3	O: 2 C: < 1	-20°C to +65°C		✓							
V4023 PV1	Cotton Cloth	Synthetic Rubber (clear)*	65 g Yellow Siliconized Paper	0,340	-	-	-	-	-	-		✓							
V4024	Cotton Cloth	Synthetic Rubber (clear)*	65 g Brown Siliconized Paper	0,270	-	-	-	-	-	-		✓							
V4030	Cotton Cloth	Synthetic Rubber plasticizer free (white)	65 g Brown Siliconized Paper	0,230	> 32,00	> 62,00	< 6	> 14	< 3	-10°C to +50°C		✓		✓				✓	
V4030 PV1	Cotton Cloth	Synthetic Rubber plasticizer free (white)	65 g Yellow Bi-Siliconized Paper	0,230	> 32,00	> 62,00	< 6	> 14	< 3	-10°C to +50°C		✓		✓				✓	
V4039 PV1	Cotton Cloth	Synthetic Rubber solvent free (clear)	80 g Yellow Bi-Siliconized Paper	0,200	60,00	87,50	20			+60°C		✓		✓				✓	
V4040	Cotton Cloth	Synthetic Rubber plasticizer free (clear)	65 g Brown Bi-Siliconized Paper	0,260	> 32,00	> 62,00	< 6	> 14	< 3	-20°C to +65°C		✓		✓				✓	
V4040 PV1	Cotton Cloth	Synthetic Rubber plasticizer free (clear)	65 g Brown Bi-Siliconized Paper	0,260		> 62,00	< 6	> 14	< 3	-20°C to +65°C		✓		✓				✓	
9064	Cotton Cloth	Natural Rubber	Siliconized Paper	0,340	9,00	140,00	-	> 24	-	-20°C to +80°C		✓	✓	✓	✓	✓			
9064V	Cotton Cloth	Natural Rubber	78 g Brown Bi-Siliconized Paper	0,300	O: 2,50 C: 6,50	159,00	-	-	-	+80°C		✓	✓	✓	✓	✓			
V4031	PET Cloth	Synthetic Rubber (white)	65 g Brown Siliconized Paper	0,185	35,00	85,00	18		< 1	-20°C to +65°C		✓		✓				✓	
V4032	PET Cloth	Synthetic Rubber	65 g Brown Siliconized Paper	0,185	> 27,50	85,00	18	> 5	< 2	-10°C to +50°C		✓		✓				✓	
V4032 PV1	PET Cloth	Synthetic Rubber	65 g Yellow Siliconized Paper	0,185	> 27,50	85,00	18	> 5	< 2	-10°C to +50°C		✓		✓				✓	
V4033	PET Cloth	Synthetic Rubber (white)	65 g Brown Bi-Siliconized Paper	0,165	> 20,00	85,00	18	> 5	< 4	-10°C to +60°C		✓		✓				✓	
V4033 PV1	PET Cloth	Synthetic Rubber (white)	65 g Yellow Bi-Siliconized Paper	0,165	> 20,00	85,00	18	2	< 4	-10°C to +60°C		✓		✓				✓	
V52100	PET Cloth Scrim	Modified Acrylic	80 g Havana Glassine Paper	0,100	26,00	-	-	1,5	-	-40°C to +120°C	✓	✓	✓	✓	✓			✓	✓
V52200	PET Cloth Scrim	Modified Acrylic	80 g Havana Glassine Paper	0,200	27,00	-	-	1,5	-	-40°C to +120°C	✓	✓	✓	✓	✓			✓	✓
V5240	PET Cloth Scrim	Modified Acrylic	80 g Havana Glassine Paper	0,040	13,00	-	-	0,42	-	-40°C to +120°C	✓	✓	✓	✓	✓			✓	✓
V5250	PET Cloth Scrim	Modified Acrylic	80 g Havana Glassine Paper	0,050	19,00	-	-	1	-	-40°C to +120°C	✓	✓	✓	✓	✓			✓	✓
V5260	PET Cloth Scrim	Modified Acrylic	80 g Havana Glassine Paper	0,060	23,00	-	-	1,25	-	-40°C to +120°C	✓	✓	✓	✓	✓			✓	✓
V5280	PET Cloth Scrim	Modified Acrylic	80 g Havana Glassine Paper	0,080	25,00	-	-	1,5	-	-40°C to +120°C	✓	✓	✓	✓	✓			✓	✓

*Different adhesion on each side **O=Open Side C=Closed Side

***Technical data provided to the best of our knowledge, without obligation. A suitability test on original products prior to use is recommended.

volzMount & volzFix

Backing	Adhesive	Liner	Thickness without liner (mm)	Adhesion to Steel (N/25 mm)	Tensile Strength (N/25 mm)	Elongation (%)	Shear Strength (h)	Rolling Ball (cm)	Temperature Resistance	Automotive & Electronics	Carpet Bonding & Exhibition Services	Furniture, Leather, & Textile Industries	General Purpose	Graphic Design & Sign Industry	Lamination	Paper & Cardboard Industries	Trim & Profile Manufacturing	
NON-WOVEN																		
V4150	Non-Woven	Synthetic Rubber (clear)	65 g Brown Bi-Siliconized Paper	0,110	26,25	16,00	2	> 89	< 5	-20°C to +65°C			✓	✓		✓	✓	
V4151	Non-Woven	Synthetic Rubber (clear)	60 g Brown Bi-Siliconized Paper	0,110	26,25	15,00	2	> 50	< 3	-10°C to +50°C		✓					✓	
V4152	Non-Woven	Synthetic Rubber (clear)	65 g Brown Bi-Siliconized Paper	0,103	> 35,00	15,00	2	> 60	< 6	-40°C to +50°C			✓	✓		✓	✓	
V4171	Non-Woven	Synthetic Rubber plasticizer free (clear)	65 g Brown Bi-Siliconized Paper	0,150	27,50	15,00	2	> 60	< 3	-20°C to +65°C			✓	✓		✓	✓	
V4451 PV2	Non-Woven	Synthetic Rubber	White Bi-Siliconized Paper	0,090	-	-	-	-	-	-20°C to +65°C				✓			✓	
V5408 PV2	Non-Woven	Modified Solvent Acrylic (clear)	95 g White PE Paper	0,080	12,50	-	-	≥ 1	-	-20°C to +60°C					✓			
V5410	Non-Woven	Acrylic	White Siliconized Paper	0,100	3,70	-	-	-	-	+200°C							✓	
V6171 PV1	Non-Woven	Modified Acrylic solvent free (clear)	Yellow Bi-Siliconized Paper	0,160	23,00	-	-	> 72	-	-40°C to +140°C			✓					
9086	Non-Woven	Modified Solvent Acrylic	105 g White PE Paper	0,100	≥ 13,00	-	-	≥ 1	≥ 2	-40°C to +150°C	✓				✓	✓	✓	✓
V9086	Non-Woven	Modified Solvent Acrylic (red)	90 g Yellow Bi-Siliconized Paper	0,90	17,00	-	-	> 72	-	-40°C to +160°C			✓				✓	
9086-04	Non-Woven	Modified Solvent Acrylic	105 g White PE Paper	0,100	≥ 13,00	-	-	≥ 24	≥ 9	-20°C to +100°C	✓				✓	✓	✓	✓
9062	Non-Woven	Modified Solvent Acrylic	115 g White PE Paper	0,170	≥ 15,00	-	-	≥ 24	≥ 3	-40°C to +180°C	✓				✓	✓	✓	✓
V9062 PV1	Non-Woven	Modified Acrylic	90 g Brownn Siliconized Paper	0,160	23,00	-	-	≥ 72	-	-40°C to +140°C		✓	✓					
FOAM																		
V4300 PV1	White PE Foam 75 kg/m³	Synthetic Rubber (clear)	65 g Brown Bi-Siliconized Paper	1,050	> 14,00	> 31,00	> 190	> 2	< 1,5	-10°C to +60°C			✓		✓		✓	
V4302 PV1	White PE Foam 100 kg/m³	Synthetic Rubber	100 g/m² Yellow Bi-Siliconized Paper	1,000	≥ 10,00	-	-	≥ 50	≤ 8	-10°C to +60°C			✓		✓		✓	
V4302 PV2	White PE Foam 100 kg/m³	Synthetic Rubber	100 g/m² White Bi-Siliconized Paper	1,000	≥ 10,00	-	-	≥ 50	≤ 8	-10°C to +60°C			✓		✓		✓	
V4303 PV1	White PE Foam 50kg/m³	Synthetic Rubber	Yellow Bi-Siliconized Paper	2,00	20,00	5	200	20		+50°C			✓		✓		✓	
V5306	White PE Foam	Modified Acrylic	Bi-Siliconized Paper	0,600	7,50	-	-	168	< 10	-30°C to +90°C	✓		✓				✓	
V5311	White PE Foam 95 kg/m³	Solvent Acrylic (clear)	Blue Bi-Siliconized PP Film	0,900	22,50	-	-	> 168	< 10	-30°C to +90°C			✓				✓	
V5312	White PE Foam 95 kg/m³	Acrylic	80 g White Bi-Siliconized Paper	0,900	22,50	-	-	168	< 10	-30°C to +120°C			✓				✓	
V5316	Black PE Foam 75 kg/m³	Acrylic	Blue Bi-Siliconized PP Film	1,500	> 11,25	-	-	> 24		-30°C to +100°C				✓			✓	
V5317	White PE Foam 67 kg/m³	Solvent Acrylic (clear)	80 g Brown Bi-Siliconized Paper	1,600	> 17,50	20,00	> 150	> 168	< 10	-30°C to +90°C				✓			✓	
V5319	White PE Foam 35 kg/m³	Modified Acrylic	Bi-Siliconized Paper	3,100	8,75	-	-	> 168	-	-30°C to +120°C	✓		✓				✓	

*Different adhesion on each side **O=Open Side C=Closed Side

***Technical data provided to the best of our knowledge, without obligation. A suitability test on original products prior to use is recommended.

volzMount & volzFix

	Backing	Adhesive	Liner	Thickness without liner (mm)	Adhesion to Steel (N/25 mm)	Tensile Strength (N/25 mm)	Elongation (%)	Shear Strength (h)	Rolling Ball (cm)	Temperature Resistance	Automotive & Electronics	Carpet Bonding & Exhibition Services	Furniture, Leather, & Textile Industries	General Purpose	Graphic Design & Sign Industry	Lamination	Paper & Cardboard Industries	Trim & Profile Manufacturing
V5320	Black PE Foam 95 kg/m³	Solvent Acrylic	Blue Bi-Siliconized PP Film	0,900	18,00	-	-	-	< 10	-30°C to +120°C	✓		✓					✓
V5321	White PE Foam 70 kg/m³	Solvent Acrylic (clear)	80 g White Bi-Siliconized Paper	1,100	22,50	> 31,00	150	168	< 10	-30°C to +120°C	✓		✓					✓
V5324	PE Foam 67 kg/m³	Solvent Acrylic	Red Bi-Siliconized PP Film	1,000	> 14,00	> 23,00	> 219	2	< 2	-20°C to +90°C	✓		✓					✓
V5325	Black PE Foam 67 kg/m³	Solvent Acrylic	Red PE Film	2,00	≥ 12,00	-	-	-	≤ 4	-	✓		✓					✓
V5327	Black PE Foam 50 kg/m³	Solvent Acrylic	Red PE Film	3,00	≥ 16,00	-	-	-	≤ 4	-	✓		✓					✓
V5331	Black PE Foam 85 kg/m³	Solvent Acrylic (clear)	Green Bi-Siliconized PE Film	0,900	17,50	-	-	> 168	< 10	-30°C to +90°C	✓		✓					✓
V5337	Black PE Foam 200 kg/m³	Solvent Acrylic (clear)	110 g Yellow Bi-Siliconized LDPE Film	0,825	> 10,00	> 50,00	> 300	> 26	< 15	-40°C to +120°C	✓				✓			✓
V5340	White PE Foam 75 kg/m³	Synthetic Rubber (clear)	80 g White Bi-Siliconized Paper	1,100	> 25,00	> 30,00	> 150	168	< 10	-10°C to +100°C	✓							✓
V5341	White PE Foam	Synthetic Rubber (clear)	Bi-Siliconized Paper	3,100	10,00	-	-	≥ 168	< 10	-10°C to +100°C	✓		✓		✓			✓
V5343	PE Foam	Modified Solvent Acrylic	White Bi-Siliconized Paper	3,100	10,00	-	-	168	< 10	-30°C to +120°C	✓		✓		✓			✓
V5346	White PE Foam 67 kg/m³	Synthetic Rubber (clear)	90 g/m² Brown Bi-Siliconized Paper	1,000	9,81	-	-	-	-	-10°C to +70°C	✓							✓
V5346 PV2	White PE Foam 67 kg/m³	Synthetic Rubber (clear)	90 g/m² White Bi-Siliconized Paper	1,000	9,81	-	-	-	-	-10°C to +70°C	✓							✓
9052	White PE Foam	Synthetic Rubber	90 g White Siliconized Paper	1,000	≥ 20,00	6,00	200	> 5000	-	-40°C to +60°C	✓							
9053	White PE Foam	Synthetic Rubber	White Bi-Siliconized Paper	2,100	8,75	-	-	≥ 168	< 10	-10°C to +100°C	✓		✓		✓			✓
9050C PV2	White PE Foam	Solvent Acrylic	White Siliconized Paper	1,000	25,00	25,00	-	> 167	-	-40°C to +90°C								✓
9050L	White PE Foam	Pure Acrylic	PE Paper	1,150	-	-	-	-	-	-40°C to +95°C			✓					✓
9050P	Black PE Foam	Natural Rubber	80g White Siliconized Paper	0,900	> 15,00	> 26,60	500	> 5000	-	-40°C to +60°C	✓							✓
9076C	Black PE Foam 180 kg/m³	Solvent Acrylic (clear)	White Siliconized Paper	0,400	20,00	40,00	550	> 160	-	-40°C to +100°C	✓							
9076P	Black PU Foam	Acrylic	White Siliconized Paper	0,400	16,00	-	350	150	-	-40°C to +120°C	✓							
FILM																		
V4100	White PP Film	Synthetic Rubber	65 g Brown Siliconized Paper	0,185	> 29,00	> 62,00	495	> 31	< 5	-10°C to +50°C		✓		✓			✓	
V4101	Clear PP Film	Synthetic Rubber	65 g Brown Siliconized Paper	0,165	> 25,00	> 62,00	495%	> 20	< 7	-10°C to +50°C		✓						✓
V4123 PV2	PE Film	Synthetic Rubber*	65 g White Bi-Siliconized Paper	0,130	O: 10,00 C: 18,00	90,00	> 600	-	O: 4 C: 6	-10°C to +60°C								
V5324 PV1	PE Film	Acrylic	90g/m² White Bi-Siliconized Paper	1100	18,00	-	-	> 300	-	-40°C to +100°C		✓		✓			✓	

*Different adhesion on each side **O=Open Side C=Closed Side

*Technical data provided to the best of our knowledge, without obligation. A suitability test on original products prior to use is recommended.

volzMount & volzFix

	Backing	Adhesive	Liner	Thickness without liner (mm)	Adhesion to Steel (N/25 mm)	Tensile Strength (N/25 mm)	Elongation (%)	Shear Strength (h)	Rolling Ball (cm)	Temperature Resistance	Automotive & Electronics	Carpet Bonding & Exhibition Services	Furniture, Leather, & Textile Industries	General Purpose	Graphic Design & Sign Industry	Lamination	Paper & Cardboard Industries	Trim & Profile Manufacturing
V4125	BOPP Film	Synthetic Rubber plasticizer free (white)	65 g Brown Siliconized Paper	0,085	18,00	104,00	> 145	> 51	< 2	-10°C to +60°C		✓			✓		✓	
V4125 PV1	BOPP Film	Synthetic Rubber plasticizer free (white)	65 g Yellow Siliconized Paper	0,085	18,00	104,00	> 145	> 51	< 2	-10°C to +60°C		✓			✓		✓	
V4125 PV2	BOPP Film	Synthetic Rubber (white)	65 g White Bi-Siliconized Paper	0,085	18,00	104,00	> 145	> 51	< 2	-10°C to +60°C		✓			✓		✓	
V4140	BOPP Film	Synthetic Rubber plasticizer free (clear)	65 g Brown Siliconized Paper	0,095	20,00	105,00	> 150	> 27	< 4	-10°C to +60°C		✓			✓		✓	
V4140 PV1	BOPP Film	Synthetic Rubber (clear)	65 g Yellow Bi-Siliconized Paper	0,095	20,00	105,00	> 150	> 27	5	-10°C to +50°C		✓		✓	✓		✓	
V4141	BOPP Film	Synthetic Rubber (clear)	65 g Brown Bi-Siliconized Paper	0,095	30,00	105,00	> 150	> 5	< 6	-10°C to +50°C		✓			✓		✓	
V4141 PV1	BOPP Film	Synthetic Rubber (clear)	65 g Yellow Bi-Siliconized Paper	0,095	30,00	105,00	> 150	> 5	< 6	-10°C to +50°C		✓			✓		✓	
V4141 PV9	BOPP Film	Synthetic Rubber (clear)	Brown Bi-Siliconized Paper	0,095	30,00	105,00	150	> 5	< 6	-10°C to +50°C		✓			✓		✓	
V4142	BOPP Film	Synthetic Rubber (white)	65 g Brown Bi-Siliconized Paper	0,095	> 22,50	105,00	> 150	> 27	> 5	-10°C to +50°C		✓			✓		✓	
V4142 PV1	BOPP Film	Synthetic Rubber (white)	65 g Yellow Bi-Siliconized Paper	0,095	> 22,50	105,00	> 150	> 27	> 5	-10°C to +50°C		✓		✓			✓	
V4143	BOPP Film	Synthetic Rubber (clear)	65 g Brown Bi-Siliconized Paper	0,085	18,00	104,00	> 145	> 51	< 2	-10°C to +60°C		✓			✓		✓	
V4143 PV1	BOPP Film	Synthetic Rubber (clear)	65 g Yellow Bi-Siliconized Paper	0,085	18,00	104,00	> 145	> 51	< 2	-10°C to +60°C		✓			✓		✓	
V4144 PV1	BOPP Film	Synthetic Rubber (white)	80 g Yellow Bi-Siliconized Paper	0,130	25,00	105,00	150	17,6	4,5	-10°C to +50°C		✓	✓		✓		✓	
V4145 PV1	BOPP Film	Synthetic Rubber (white)	70 g Yellow Siliconized Paper	0,120	> 20,00	>105,00	> 150	>130	< 8	-10°C to +50°C		✓	✓		✓		✓	
V4131	PET Film	Modified Solvent Acrylic*	115 g White PE Paper	0,050	O: ≥ 10,00 C: 1,80	-	-	O: > 1 C: 0,5	-	-20°C to +120°C					✓			
V4133	PET Film	Modified Solvent Acrylic*	115 g White PE Paper	0,090	O: ≥ 15,00 C: 10,00	-	-	O: ≥ 24 C: 24	-	20°C to +120°C					✓			
V5130	PET Film	Modified Solvent Acrylic	80 g White Bi-Siliconized Paper	0,085 mm	13,00	70,00	90	> 30	< 4 cm	-30°C to +160°C						✓	✓	
V5133	PET Film	Modified Solvent Acrylic	Red Bi-Siliconized MOPP Film	0,170	29,00	55,50	6)	> 500	< 5 cm	-30°C to +200°C	✓		✓			✓		
V5133 PV1	PET Film	Modified Solvent Acrylic	Red Bi-Siliconized PP Film	0,190	24,00	-	-	> 400	-	-40°C to +180°C	✓						✓	✓
V5133 PV2	PET Film	Acrylic	Red Bi-Siliconized PP Film	0,160	18,00	-	-	> 400	-	-40°C to +180°C					✓			✓
V5139	PET Film	Modified Solvent Acrylic	White Bi-Siliconized Paper	0,170	5,00	10,00	150	16	< 5 cm	-30°C to +120°C						✓	✓	
V5324 PV1	PET Film	Acrylic	90 g/m² White Bi-Siliconized Paper	1100	18,00	-	-	> 300	-	-40°C to +100°C	✓				✓			✓
V9017	PET Film	Modified Acrylic*	90 g/m² Brown Bi-Siliconized Paper	0,100	O: 16,00 C: 1,00	-	-	O: >48 C: > 500	-	-40°C to +120°C		✓		✓				
V9065	PET Film	Modified Acrylic	Bi-Siliconized PP Film	0,210	24,00	-	-	> 400	-	-40°C to +180°C	✓						✓	✓
V9065 PV1	PET Film	Modified Acrylic	90 g/m² Yellow Bi-Siliconized Paper	0,210	24,00	-	-	> 400	-	-40°C to +180°C								

*Different adhesion on each side **O=Open Side C=Closed Side

*Technical data provided to the best of our knowledge, without obligation. A suitability test on original products prior to use is recommended.


volzMount & volzFix

	Backing	Adhesive	Liner	Thickness without liner (mm)	Adhesion to Steel (N/25 mm)	Tensile Strength (N/25 mm)	Elongation (%)	Shear Strength (h)	Rolling Ball (cm)	Temperature Resistance	Automotive & Electronics	Carpet Bonding & Exhibition Services	Furniture, Leather, & Textile Industries	General Purpose	Graphic Design & Sign Industry	Lamination	Paper & Cardboard Industries	Trim & Profile Manufacturing	
V9067	PET Film	Modified Solvent Acrylic	90 g/m ² Brown Siliconized Paper	0,160	18,00	-	-	> 400	-	-40°C to +180°C	✓					✓	✓	✓	
V9072	PET Film	Modified Acrylic	90 g/m ² Yellow Bi-Siliconized Paper	0,050	14,00	-	-	> 3	-	-40°C to +180°C	✓								
9017F	PETP Film	Modified Dispersions Acrylic*	Siliconized Paper	0,160	O: > 15,00 C: > 5,00	-	-	-	-	-30°C to +120°C		✓		✓					
9017 PV3	PET Film	Modified Acrylic*	120 g/m ² White Bi-Siliconized Paper	0,100	O: 3,00 C: 20,00	-	-	-	-	-40°C to +120°C	✓				✓		✓		
9028	PET Film	Modified Solvent Acrylic	90 g White Siliconized Paper	0,125	≥ 17,50	-	-	≥ 168	≥ 3	-40°C to +180°C	✓				✓			✓	
9065	PET Film	Modified Solvent Acrylic	Red MOPP Film	0,205	≥ 20,00	-	-	≥ 168	≥ 1	-40°C to +180°C	✓		✓		✓			✓	
9065 PV1	PET Film	Modified Solvent Acrylic	120 g White PE Paper	0,205	≥ 20,00	-	-	≥ 168	-	-40°C to +150°C	✓								
9067	PET Film	Modified Solvent Acrylic	90 g White Siliconized Paper	0,160	≥ 17,50	-	-	≥ 168	≥ 3	-40°C to +180°C	✓					✓	✓	✓	
9072	PET Film	Acrylic	White Siliconized Paper	0,055	12,70	49,00	60%	1	-	-40°C to +80°C	✓								
9072L	PET Film	Modified Solvent Acrylic	90 g White PE Paper	0,048	≥ 12,50	-	-	≥ 168	≥ 10	-40°C to +100°C	✓								
9080-105	PET Film	Modified Solvent Acrylic	105 g White PE Paper	0,080	≥ 15,00	-	-	≥ 168	≥ 4	-40°C to +120°C	✓								
9080-120	PET Film	Modified Solvent Acrylic	120 g White PE Paper	0,080	≥ 15,00	-	-	≥ 168	≥ 4	-40°C to +120°C	✓								
9082 PV2	PET Film	Modified Dispersions Acrylic solvent free (clear)	White Siliconized Paper	0,110	≥ 5,00	-	-	-	-	-40°C to +90°C		✓							
9082	PET Film	Modified Solvent Acrylic	90 g White PE Paper	0,100	≥ 15,00	-	-	≥ 168	4	-40°C to +100°C	✓								
11965	PET Film	Modified Solvent Acrylic	90 g Yellow Siliconized Paper	0,205	≥ 18,00	-	-	≥ 168	-	-40°C to +100°C	✓				✓				
11965 PV1	PET Film	Solvent Acrylic	90 g Yellow Siliconized Paper	0,205	17,00	-	-	≥ 17	-	-40°C to +180°C	✓				✓				
9070	PVC Film	Modified Solvent Acrylic	90 g Brown Siliconized Paper	0,230	≥ 35,00	-	-	≥ 168	≥ 3	-40°C to +80°C	✓								
TRANSFER																			
V5263	Transfer	Modified Solvent Acrylic	90 g Brown Bi-Siliconized Paper	0,050	6,25	-	-	≥ 168	< 10	-30°C to +140°C			✓		✓	✓	✓		
V5263 PV1	Transfer	Acrylic	100 g/m ² Brown Bi-Siliconized PE Paper	0,060	15,00	-	-	> 1000	-	-40°C to +200°C					✓				
V5263 PV2	Transfer	Modified Dispersion Acrylic	Yellow Bi-Siliconized Paper	0,050	12,00	-	-	> 24	-	-40°C to +140°C			✓						
V5265	Transfer	Modified Acrylic	Brown Siliconized Paper	0,125	22,50	-	-	168	< 10	-30°C to +140°C					✓	✓	✓		
V5265 PE	Transfer	Modified Solvent Acrylic	Brown Bi-Siliconized Paper	0,125	22,50	-	-	168	< 10	-30°C to +140°C						✓	✓		
V52200 PV2	Transfer PET Scrim	Acrylic	White PP Film	-	28,00	-	-	2	-	-40°C to +120°C	✓					✓			
V52230 PV2	Transfer PET Scrim	Acrylic	White PP Film	-	30,00	-	-	2	-	-40°C to +120°C	✓		✓			✓			

*Different adhesion on each side **O=Open Side C=Closed Side

***Technical data provided to the best of our knowledge, without obligation. A suitability test on original products prior to use is recommended.

Structure of Double-Sided Adhesive Tape

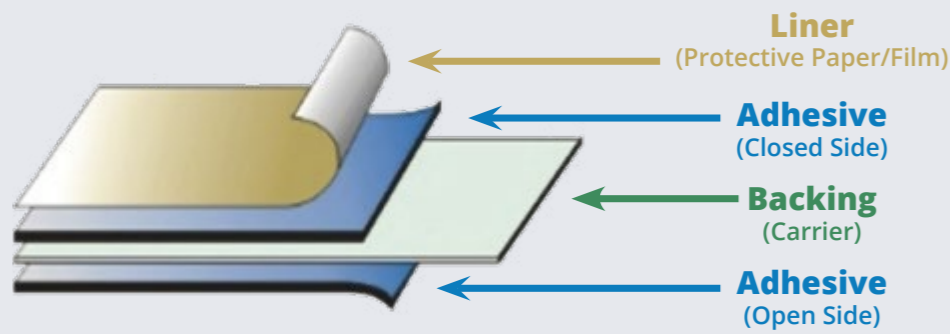

volzMount and volzFix consist of a protective release material called the Liner, a Backing (carrier), and an adhesive mass on each side of the backing. volzMount and volzFix are listed in this catalog by their Backing.



In addition to volzMount and volzFix, we offer an extensive selection of premium double-sided tapes. For durable and flexible bonding, discover our **volzAcrylicFoam** tapes, and for diverse electrical insulation applications, see our specially engineered **volzElektro** tapes. Both catalogs are available for download: www.volztapes.com

Custom Double-Sided Die-Cuts: Precision Meets Performance

From attaching auto emblems and electronic components, to creating clean-lined graphics, and securing interior appliance parts, die-cuts provide precision, consistency, and durability with quick and effortless application.

Double-sided die-cuts combine flexibility with high performance and are an ideal alternative to traditional fasteners. Whether a temporary or permanent bond is needed, they deliver reliable adhesion across diverse applications.



Available as individual pieces or on rolls, die-cuts integrate seamlessly into a wide range of manufacturing work-flows, from small-batch, manual assembly to fully automated lines.

Converting and Distribution

Adhesive Solutions For Every Requirement

VOLZ® TAPES has spent years cultivating strong business partnerships with leading industry manufacturers to optimize our ability to provide turnkey solutions to our customers' adhesive tape, stamped parts and label requirements. We are a trusted **tesa® Gold Converting Partner**, the top and a reliable import, distribution and converting partner to leading manufacturers such as **Intertape® Polymer Group (ipg)**, **3M**, **Scapa**, **Nitto** and more.

VOLZ® TAPES converts large-format tapes, pressure sensitive adhesives, fasteners and more into smaller, more user-friendly form factors. We also offer slitting, sheeting, rewinding, tape printing, perforating, private labeling and packaging, laminating, cut-to-length, contract converting, die and kiss-cutting, and other custom designed solutions.

Ask us how custom, double-sided die-cut parts can streamline your production and elevate product performance.





Volz Selbstklebetechnik GmbH
Fischerinsel 3
DE - 79227 Schallstadt
+49 7664 50500 - 0
info@volztapes.com



www.volztapes.com

